

BAND SAW BLADES

Eberle CT-flex nano

Performance
Precision
Quality

INTELLIGENT SOLUTIONS
MADE BY


Eberle

CT-flex® nano

Coated carbide-tipped blade

Features: TiAlN-coating, MultiChip® geometry, heat and wear resistant cutting edge, pre-honed tooth edges
 Applications: stainless, acid-resistant, hardening martensitic steel, nickel-based alloys
 ≤ 65 HRC

Work pieces:  round bar  square bar  flat bar



mm	teeth per inch (tpi)							in
	0,75/1,25	1/1,3	1,4/2	2	2/3	3	3/4	
41 x 1,30			TR ●	TR ○	TR ●	TR ○	TR ○	1 1/2 x .050
54 x 1,60		TR ○	TR ●	TR ○	TR ○			2 x .063
67 x 1,60	TR ○	TR ●	TR ●					2 5/8 x .063
80 x 1,60	TR ●		TR ●					3 1/8 x .063

CT-flex® 3000

Carbide-tipped blade

Features: CT3 geometry, excellent performance, short cycle times, high stability
 Applications: extremely hard-to-cut materials
 ≤ 65 HRC

Work pieces:  round bar  square bar  flat bar




mm	teeth per inch (tpi)							in
	0,75/1,25	1/1,3	1,4/2	2	2/3	3	3/4	
27 x 0,90					TR			1 x .035
34 x 1,10				TR	TR	TR		1 1/4 x .042
41 x 1,30			TR	TR	TR	TR		1 1/2 x .050
54 x 1,60	TR	TR	TR	TR				2 x .063
67 x 1,60	TR	TR	TR					2 5/8 x .063
80 x 1,60	TR		TR					3 1/8 x .063

CT-flex® 4000

Carbide-tipped blade

Features: CT4 geometry, excellent performance, short cycle times, very smooth running blade
 Applications: hard-to-cut materials, Aluminum
 ≤ 65 HRC

Work pieces:  round bar  square bar  flat bar




mm	teeth per inch (tpi)							in
	0,75/1,25	1/1,3	1,4/2	2	2/3	3	3/4	
20 x 0,90						TR		3/4 x .035
27 x 0,90					TR	TR	TR	1 x .035
34 x 1,10				TR	TR	TR	TR	1 1/4 x .042
41 x 1,30			TR	TR	TR	TR	TR	1 1/2 x .050
54 x 1,60	TR	TR	TR	TR	TR			2 x .063
67 x 1,60	TR	TR	TR					2 5/8 x .063
80 x 1,60	TR		TR					3 1/8 x .063

CT-flex® CHM

Carbide-tipped blade

Features: Multichip® geometry, superior performance, negative rake angle, extreme wear resistance
 Applications: case hardened and chrome plated materials ≤ 65 HRC

Work pieces:  round bar  tubes  bundle single-layer



mm	teeth per inch (tpi)						in
			3	3/4			
27 x 0,90			TRN	TRN			1 x .035
34 x 1,10			TRN	TRN			1 1/4 x .042
41 x 1,30			TRN	TRN			1 1/2 x .050

CT-flex® ALU XL

Carbide-tipped blade

Features: Multichip® geometry, improved chip formation, minor material loss, less forces
 Applications: large plates and large blocks of Aluminum

Work pieces:  round bar  square bar  flat bar







mm	teeth per inch (tpi)						in
		0,75/1,25	1/1,3	1,4/2	2	2/3	
41 x 1,30				TR	TR	TR	1 1/2 x .050
54 x 1,60		TR	TR	TR			2 x .063
67 x 1,60		TR	TR	TR			2 5/8 x .063
80 x 1,60		TR					3 1/8 x .063

CT-flex® Pro

Carbide-tipped blade

Features: set tooth, unique tooth geometry, minor vibration development
 Applications: corrosion and acid-resistant steels, nickel-based alloys ≤ 65 HRC

Work pieces:  round bar  tubes  square bar  flat bar




mm	teeth per inch (tpi)						in
		1,4/2	2	2/3	3	3/4	
20 x 0,90					ST		3/4 x .035
27 x 0,90					ST	ST	1 x .035
34 x 1,10				ST		ST	1 1/4 x .042
41 x 1,30		ST	ST	ST			1 1/2 x .050
54 x 1,60		ST					2 x .063

ST = set tooth

nanoflex® VTX

Coated
bimetal blade

Features: TiAlN-coating, micro-resistant cutting edge, increased tooth hardness, variable tooth height with strongly positive rake angle
Applications: corrosion and acid-resistant steel, nickel-based alloys, tempered steel
≤ 50 HRC

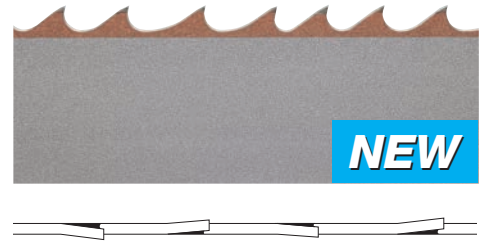


Work pieces: round bar thick-walled tubes square bar flat bar

mm	teeth per inch (tpi)					in
	0,65/0,95	0,75/1,25	1,4/2	2/3		
34 x 1,10				CHT		1 1/4 x .042
41 x 1,30				CHT	CHT	1 1/2 x .050
54 x 1,30				CHT	CHT	2 x .050
54 x 1,60				CHT	CHT	2 x .063
67 x 1,60		CHT	CHT	CHT		2 5/8 x .063
80 x 1,60		CHT	CHT	CHT		3 1/8 x .063

nanoflex® Black

Coated
bimetal blade

Features: TiAlN-coating, prehoned edges, short cycle times, excellent wear resistance
Applications: universally applicable
≤ 50 HRC

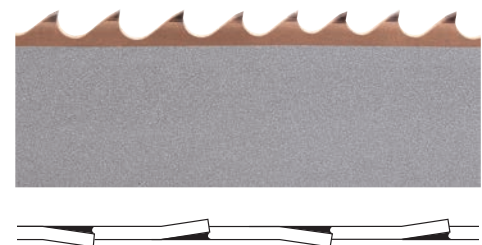


Work pieces: round bar thick-walled tubes bundle single-layer
 square bar flat bar beams special profiles

mm	teeth per inch (tpi)					in
	0,75/1,25	1/1,3	1,4/2	2/3	3/4	
41 x 1,30			DCS	DCS	DCS	1 1/2 x .050
54 x 1,60		CSP	DCS	DCS	DCS	2 x .063
67 x 1,60	DCS	CSP	DCS			2 5/8 x .063
80 x 1,60	DCS	CSP	DCS			3 1/8 x .063

duoflex® VTX

Bimetal blade

Features: micro-resistant cutting edge, increased tooth hardness, variable tooth height with strongly positive rake angle
Applications: corrosion and acid-resistant steel, nickel-based alloys, tempered steel
≤ 50 HRC

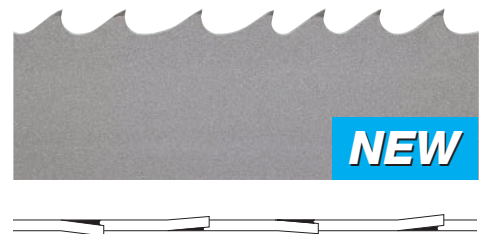

Work pieces: round bar thick-walled tubes square bar flat bar

mm	teeth per inch (tpi)					in
	0,65/0,95	0,75/1,25	1,4/2	2/3		
34 x 1,10				CHT		1 1/4 x .042
41 x 1,30				CHT	CHT	1 1/2 x .050
54 x 1,30				CHT	CHT	2 x .050
54 x 1,60				CHT	CHT	2 x .063
67 x 1,60		CHT	CHT	CHT		2 5/8 x .063
80 x 1,60		CHT	CHT	CHT		3 1/8 x .063

duoflex® GTX

Bimetal blade

Features: ground triple chip tooth geometry,
micro-resistant cutting edge, excellent surface finish

Applications: large applications
≤ 50 HRC



Work pieces: round bar square bar flat bar beams

mm	teeth per inch (tpi)						in
	0,75/1,25	1/1,3	1,4/2				
54 x 1,60	DCS	CSP	DCS				2 x .063
67 x 1,60	DCS	CSP	DCS				2 5/8 x .063
80 x 1,60	DCS	CSP	DCS				3 1/8 x .063

duoflex® SPX

Bimetal blade

Features: special tooth geometry,
micro-resistant cutting edge, reduced cutting force

Applications: austenitic steels, nickel-based alloys
≤ 49 HRC



Work pieces: round bar thick-walled tubes square bar flat bar beams

mm	teeth per inch (tpi)						in
	0,75/1,25	1/1,3	1,4/2	2/3	3/4		
27 x 0,90					CSP		1 x .035
34 x 1,10					CSP	CSP	1 1/4 x .042
41 x 1,30				CSP	CSP	CSP	1 1/2 x .050
54 x 1,60		CSP	CSP	CSP			2 x .063
67 x 1,60	CSP	CSP	CSP	CSP			2 5/8 x .063
80 x 1,60	CSP	CSP					3 1/8 x .063

duoflex® MX55

Bimetal blade

Features: micro-resistant cutting edge, resistant against interrupted cuts,

Applications: hard-to-cut materials, e.g. Duplex- and heat resistant steel,
Titanium and Titanium alloys, Aluminum bronze, tempered steel
≤ 49 HRC



Work pieces: round bar thick-walled tubes bundle single-layer
 bundle multiple-layer bundle multiple-layer square bar flat bar beams

mm	teeth per inch (tpi)						in
	0,75/1,25	1,4/2	2/3	3/4	4/6		
27 x 0,90			DCS	DCS	CS		1 x .035
34 x 1,10			DCS	DCS	CS		1 1/4 x .042
41 x 1,30			DCS	DCS			1 1/2 x .050
54 x 1,60		DCS	DCS	DCS			2 x .063
67 x 1,60	DCS	DCS	DCS				2 5/8 x .063
80 x 1,60	DCS	DCS					3 1/8 x .063

duoflex® M42

Bimetal blade

Features: efficient and powerful saw blade with vibration resistant tooth edge
 Applications: universally applicable
 ≤ 44 HRC



- Work pieces:
- round bar
 - thick-walled tubes
 - bundle single-layer
 - bundle multiple-layer
 - bundle multiple-layer
 - square bar
 - flat bar
 - bundle multiple-layer
 - beams
 - special profiles



mm	teeth per inch (tpi)														in		
	3	4	6	8	10	14	0,75/ 1,25	1,4/2	2/3	3/4	4/6	5/8	6/10	8/12		10/14	
6 x 0,90		CW	CW			N	N									N	1/4 x .035
10 x 0,90		CW	CW			N	N									N	3/8 x .035
13 x 0,65		CW	CW			N	N							N	N	N	1/2 x .025
13 x 0,90	CW	CW	CW	N	N	N							N	N	N		1/2 x .035
20 x 0,90					N	N					N/CS	N	N	N	N		3/4 x .035
27 x 0,90	DCS	CS	N						DCS	N/DCS	N/CS DCS	N/CS	N	N	N		1 x .035
34 x 1,10			CS						DCS	N/DCS	N/CS	N	N	N			1 1/4 x .042
41 x 1,30			CS						DCS	DCS	DCS	N/CS	N				1 1/2 x .050
54 x 1,30									DCS	DCS	CS						2 x .050
54 x 1,60								DCS	DCS	DCS	DCS	CS					2 x .063
67 x 1,60								DCS	DCS	DCS	DCS						2 5/8 x .063
80 x 1,60								DCS	DCS								3 1/8 x .063

duoflex® PT

Bimetal blade

Features: highest cutting performance in interrupted cuts,
 reduced vibration, resistant to tooth breakage
 Applications: pipes and tubes
 ≤ 44 HRC




- Work pieces:
- tubes
 - bundle single-layer
 - bundle multiple-layer
 - bundle multiple-layer
 - bundle multiple-layer
 - beams
 - special profiles




mm	teeth per inch (tpi)							in
		2/3	3/4	4/6	5/8	8/12		
20 x 0,90						CST		3/4 x .035
27 x 0,90		CST	CST	CST	CST	CST		1 x .035
34 x 1,10		CST	CST	CST	CST			1 1/4 x .042
41 x 1,30		CST	CST	CST	CST			1 1/2 x .050
54 x 1,60		CST	CST	CST				2 x .063
67 x 1,60		CST	CST					2 5/8 x .063

CUTTING RECOMMENDATIONS FOR SOLID MATERIAL

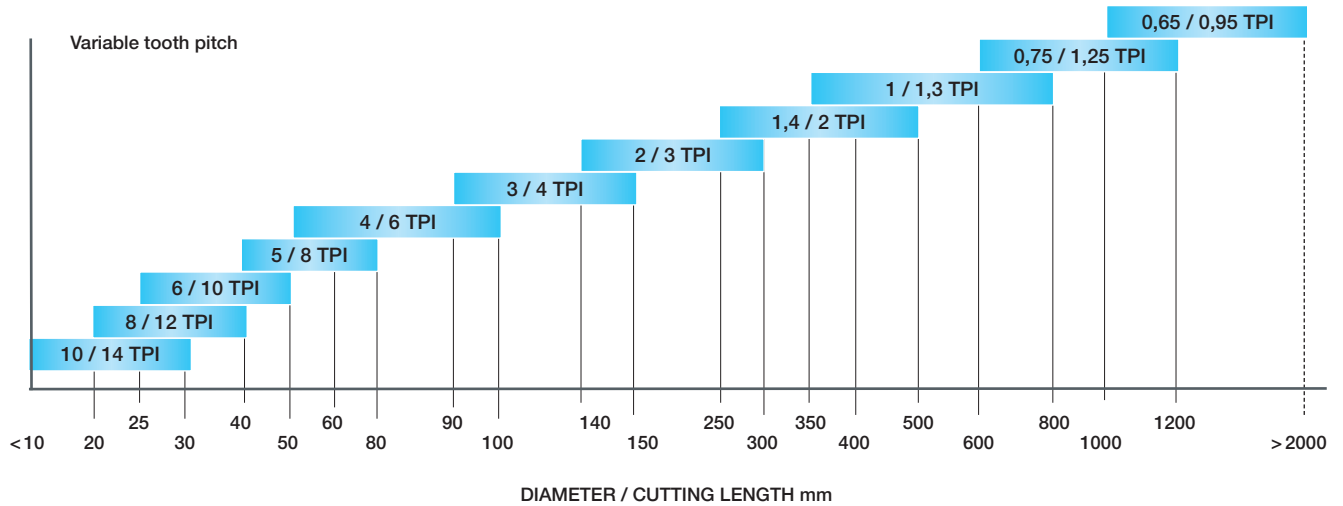


CUTTING RECOMMENDATIONS FOR TUBES AND PROFILES

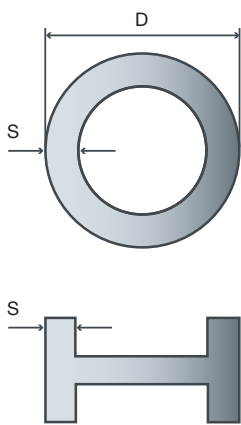

D mm	20	40	60	80	100	150	200	300	400	500	> 700
S mm	teeth per inch (tpi)										
2	14	14	14	14	10/14	10/14	10/14	10/14	8/12	8/12	6/10
3	14	10/14	10/14	8/12	8/12	8/12	6/10	6/10	6/10	6/10	6/10
4	14	10/14	10/14	8/12	8/12	6/10	6/10	5/8	5/8	4/6	4/6
5	14	10/14	10/14	8/12	6/10	6/10	5/8	4/6	4/6	4/6	4/6
6	14	10/14	8/12	8/12	6/10	5/8	5/8	4/6	4/6	4/6	4/6
8	14	8/12	6/10	6/10	6/10	5/8	5/8	4/6	4/6	4/6	4/6
10		6/10	6/10	5/8	5/8	4/6	4/6	4/6	4/6	3/4	3/4
12		6/10	5/8	4/6	4/6	4/6	4/6	3/4	3/4	3/4	3/4
15				4/6	4/6	3/4	3/4	3/4	3/4	2/3	2/3
20				4/6	4/6	3/4	3/4	3/4	3/4	2/3	2/3
30				3/4	3/4	3/4	2/3	2/3	2/3	2/3	1,4/2
50						2/3	2/3	2/3	2/3	1,4/2	1,4/2
80							2/3	1,4/2	1,4/2	1,4/2	1/1,3
100								1,4/2	1,4/2	1/1,3	0,75/1,25
150										0,75/1,25	0,75/1,25
> 250										0,75/1,25	0,75/1,25


TOOTH FORMS




N-TOOTH | neutral rake angle
 > short-chip materials
 > small work pieces



CST-TOOTH | positive rake angle
 > short-chip materials
 > profiles, tubes, bundles




CS-TOOTH | positive rake angle
 > long-chip, tough materials
 > universal application




CW-TOOTH | positive rake angle
 > low-alloy materials, Aluminum
 > mold construction, contours



DCS-TOOTH | positive rake angle
 > heavy duty, high alloyed work pieces
 > large cross-sections



CHT-TOOTH | variable, extremely positive rake angle
 > hard-to-cut materials, heat-treated steels
 > large to very large work pieces



CSP-TOOTH | positive rake angle
 > austenitic materials
 > nickel-based alloys



TR/TRN-TOOTH | variable rake angle
 > heavy duty work pieces
 > high cutting performance

J. N. Eberle & Cie. GmbH

Eberlestr. 28
 D-86157 Augsburg
 Tel.: +49 (821) 52 12-0
 Fax: +49 (821) 52 12-300
 info@eberle-augsburg.de
 www.eberle-augsburg.de

Eberle America, Inc.

6311 Ronald Reagan Drive
 Suite 174
 USA-63367 Lake St. Louis, MO
 Tel.: +1 (314) 406-1102
 Fax: +1 (636) 240-6155
 info@eberleblades.com
 www.eberle-america.com

Eberle France

20, Boulevard des Nations
 F-69960 Corbas
 Tél: +33 (4) 78 96 07 53
 Fax: +33 (4) 78 96 97 67
 contact@eberlefrance.fr
 www.eberle-france.com

Eberle Italia S.r.l.

Via Umbria 3/D
 I-20098 San Giuliano Milanese
 Tel.: +39 (02) 98 28 17 17
 Fax: +39 (02) 98 28 01 78
 eberle@eberle.it
 www.eberle.it

CUSTOMER SERVICE – YOUR BENEFIT.

Put your trust in our experience

Our international distribution network is based on long-standing partnerships with top-notch sawing specialists who help solve your specific questions regarding various applications.

To place an order, please contact either your regional Eberle Exclusive Agent (EEA), local distributor, the Eberle branch responsible for you or get in touch with our headquarter in Augsburg.

Upcoming Trade Shows

For a detailed overview about our trade shows with direct access to the event website and to Google Maps, please refer to our homepage www.eberle-augsburg.de.

Eberle Cutting Data App

The Eberle Cutting Data App provides you immediately and precisely with the cutting parameters for individual bimetal and carbide tipped band saw cutting. It can be downloaded from our homepage or www.eberleslidechart.com or from:

**Training**

We offer band saw blade training to your company upon request. Just contact our distribution network or get in touch with our headquarter.

Technical advice

Should you have any questions about band saw applications or ways to optimize sawing processes, Eberle's expert team will provide competent support:

Tel.: +49 (821) 5212-220
Fax: +49 (821) 5212-300
Email: support@eberle-augsburg.de

We look forward to your call.

Eberle

J.N. Eberle & Cie. GmbH, Augsburg, Germany
 Cold Rolling Mill and Saw Factory
 Quality products since 1836